



Data Sheet

RISH Master 3430*i*



Measure



Control




Record



Analyze

Application :

RISH Master 3430i measures important electrical parameters & replaces the multiple analog panel meters. It measures electrical parameters like AC current, Voltage, frequency, Power, Energy (Active/ Reactive/Apparent), Harmonic Distortion. The instrument has optional output as one pulse output or two pulse output for energy measurement.

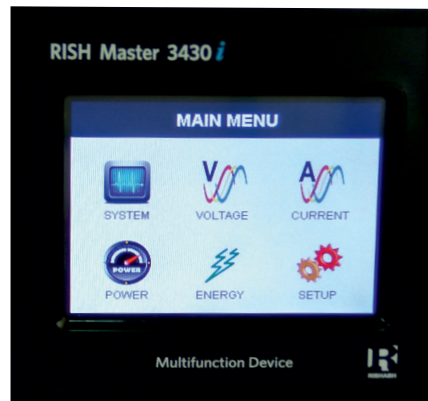

Product Features:

Touch screen graphics LCD:

Rish Master 3430i has touch sensible color graphics LCD display with resolution of 320x240.

Phasor Diagram:

Pictorial representation of all 3 Phases (Voltage & Current) in terms of vectors.

Custom color setting:

User can assign individual colour for each each phase as per the application requirement through display .

WaveForm:

Pictorial representation of all 3 phases Current & voltage in terms of sinusoidal waveform.

True RMS measurement:

The instrument measures distorted waveform up to 15th Harmonic.

Energy measurement (Import and Export):

Active energy (kWh), Reactive energy (kVArh) and Apparent energy (kVAh). Any of the parameters can be freely assigned to 2 optional pulse outputs.

Energy Update Rate:

This updates the energy values in the registers depending on the energy rate selected by the user. Energy update rate can be set from 1 min. to 60 min.

Energy Count storage:

In case of power failure, the instrument memorizes the last energy count.

Min Max storage of parameters possible:

The instrument stores minimum and maximum values for System Voltage and System Current. Every 40 sec minimum and maximum readings are updated.

Total Harmonic Distortion (THD):

The instrument can measures per phase THD of voltage and THD of current.

Programmable Energy format & Energy rollover count:

Customer can assign the format for energy display on MODBUS (RS485) in terms of Wh, kWh or MWh. Additional to this, customer can also set a rollover count from 7 to 14 digits (for Wh), 7 to 12 digits (for kWh) & 7 to 9 digits (for MWh), after which the energy will roll back to zero. The above settings are applicable for all types of energy.

Optional MODBUS (RS485) Output (With Optical Isolation)

The optional ModBus output enables the instrument to transmit all the measured parameters over standard MODBUS (RS485).

Optional Pulse Output (1 or 2 Relay output) :

The instrument can be programmed as Pulse output or Limit Switch.

Pulse Output: The optional pulse output is a potential free, very fast acting relay contact which can be used to drive an external mechanical counter for energy measurement.

Optional Analog Outputs:

(2 Outputs – 4-20mA or 0 -1 mA): 2 Analog outputs can be programmed from a list of input parameters.

Enclosure Protection for dust and water :

conforms to IP 54 (front face) as per IEC60529

Compliance to International Safety standards:

Compliance to International Safety standard IEC 61010-1- 2001

EMC Compatibility:

Compliance to International standard IEC 61326



Measure



Control




Record




Analyze

Electrical Connection:

Network Types :

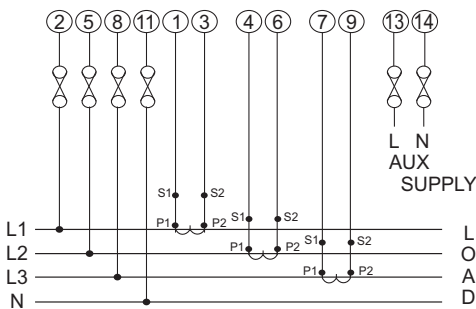

a) 3 Phase 4 Wire Unbalanced Load

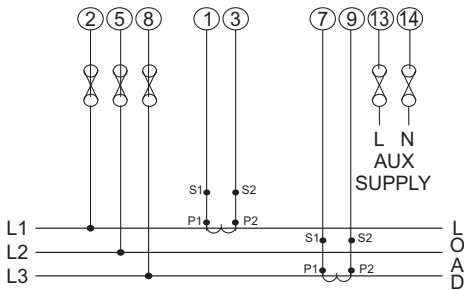

b) 3 Phase 3 Wire Unbalanced Load

It is recommended that the wires used for connections to the instrument should have lugs soldered at the end. That is, the connections should be made with lugged wires for secure connections. The Maximum diameter of the lug should be 7.0 mm and maximum thickness 3.5mm.

Permissible cross section of the connections wires:
 ≤ 4.0 mm sq. single wire or 2×2.5 mm sq. fine wire

Technical Specifications:

Input Voltage:

| | |
|--------------------------------|--|
| Nominal input voltage (AC RMS) | Phase –Neutral 57.7 - 346 V _{L-N} Line-Line 100 - 600 V _{L-L} |
| System PT primary values | 100VLL to 692kVLL programmable on site* |
| Max continuous input voltage | 120% of rated value |

Input Current:

| | |
|------------------------------|--|
| Nominal input current | 1A / 5A AC RMS. |
| System CT secondary values | 1A & 5A programmable on site. |
| System CT primary values | From 1A up to 9999A* (for 1 or 5 Amp) |
| Max continuous input current | 120% of rated value |

Auxiliary Supply:

| | |
|-------------------------------------|---|
| AC /DC Auxiliary Supply | 60 – 300 VAC /DC OR 65 – 300 VAC /DC for Ethernet Option OR 12 – 60 VAC /DC |
| AC Auxiliary supply frequency range | 45 to 66 Hz |

VA Burden:

| | |
|------------------------------|---|
| Nominal input voltage burden | < 0.35 VA approx. per phase |
| Nominal input current burden | < 0.3 VA approx. per phase |
| Auxiliary Supply burden | < 6.5 VA approx. < 8 VA approx. for Analog / Ethernet option |

Overload Withstand:

| | |
|---------|---|
| Voltage | 2 x rated value for 1 second, repeated 10 times at 10 second intervals |
| Current | 20x for 1 second, repeated 5 times at 5 min |

Operating Measuring Ranges:

| | |
|--------------|---------------------------|
| Voltage | 10... 120% of rated value |
| Current | 5 ... 120% of rated value |
| Frequency | 40...70 Hz |
| Power Factor | 0.5 Lag ... 1... 0.8 Lead |

Reference conditions for Accuracy:

| | |
|----------------------------|---|
| Reference temperature | 23°C +/- 2°C |
| Input waveform | Sinusoidal (distortion factor 0.005) |
| Input frequency | 50 or 60 Hz $\pm 2\%$ |
| Auxiliary supply voltage | Rated Value $\pm 1\%$ |
| Auxiliary supply frequency | Rated Value $\pm 1\%$ |
| Voltage Range | 50... 100% of Nominal Value. 60... 100% of Nominal Value for THD. |
| Current Range | 10... 100% of Nominal Value. 20... 100% of Nominal Value for THD. |
| Power | Cos phi / sin phi = 1 for Active / Reactive Power & Energy. 10... 100% of Nominal Current & 50... 100% of Nominal Voltage. |
| Power Factor / Phase Angle | 40... 100% of Nominal Current & 50... 100% of Nominal Voltage |

*Max Power setting 462.962 MVA Per phase
 i.e (CT Primary x PT Primary (VLL) / 1.73205) < 462.962 MVA



Measure



Control



Record



Analyze




Technical Specifications:

Accuracy:

| | Class 1.0 (Standard) | Class 0.5 (on request) | Class 0.2 (on request) |
|---------------------------|--------------------------|--------------------------|--------------------------|
| Voltage | ± 0.5% of Nominal value | ± 0.5% of Nominal value | ± 0.2% of Nominal value |
| Current | ± 0.5% of Nominal value | ± 0.5% of Nominal value | ± 0.2% of Nominal value |
| Frequency | ± 0.15% of mid frequency | ± 0.15% of mid frequency | ± 0.15% of mid frequency |
| Active Power | ± 0.5% of Nominal value | ± 0.5% of Nominal value | ± 0.2% of Nominal value |
| Re-Active Power | ± 0.5% of Nominal value | ± 0.5% of Nominal value | ± 0.4% of Nominal value |
| Apparent Power | ± 0.5% of Nominal value | ± 0.5% of Nominal value | ± 0.2% of Nominal value |
| Active energy (kWh) | ± 1.0% of Nominal value | ± 0.5% of Nominal value | ± 0.2% of Nominal value |
| Re Active energy (kVAh) | ± 1.0% of Nominal value | ± 0.5% of Nominal value | ± 0.5% of Nominal value |
| Apparent energy (kVAh) | ± 1.0% of Nominal value | ± 0.5% of Nominal value | ± 0.2% of Nominal value |
| Accuracy of Analog Output | 1 % of Output end value | 1 % of Output end value | 1 % of Output end value |
| Power Factor | ±1% of Unity | ±1% of Unity | ±1.0% of Unity |
| Angle | ±1% of range | ±1% of range | ±1% of range |
| Total Harmonic Distortion | ±1% | ±1% | ±1% |

Note:- Measurement error is normally much less than the error specified above. Variation due to influence quantity is less than twice the error allowed for reference condition

Dimensions Details:

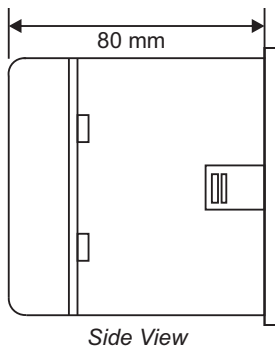

Influence of Variations:

| | |
|---|---|
| Temperature coefficient : | 0.025%/°C - Voltage (50... 120% of rated value) |
| (for rated value range of use (0...50°C)) | 0.05%/°C - Current (10... 120% of rated value) |

Display update rate:

| | |
|-----------------------------|---------------|
| Response time to step input | 1 sec approx. |
|-----------------------------|---------------|

Applicable Standards:

| | |
|------------------------|--|
| EMC | IEC 61326 |
| Immunity | IEC 61000-4-3. |
| | 10V/m min – Level 3 industrial low level |
| Safety | IEC 61010-1-2001 , Permanently connected use |
| IP for water & dust | IEC60529 |
| Pollution degree: | 2 |
| Installation category: | III |
| High Voltage Test | 2.2 kV AC, 50Hz for 1 minute between all electrical circuits |

Environmental

| | |
|-----------------------|-------------------------------|
| Operating temperature | -10 to +55°C |
| Storage temperature | -20 to +65°C |
| Relative humidity | 0... 90% non condensing |
| Warm up time | Minimum 3 minute |
| Shock | 15g in 3 planes |
| Vibration | 10... 55 Hz, 0.15mm amplitude |
| Enclosure | IP54 (front face only) |

Energy Pulsed Output Option :

| | |
|---------------------------------------|--------------|
| Relay contact | 1 NO + 1 NC |
| Switching Voltage & Current for Relay | 240 VDC ,5 A |
| Default pulse rate divisor | |

| | 1 per Wh (up to 3600W), | 1 per kWh (up to 3600kW), | 1 per MWh (above 3600 kWh) |
|------|-----------------------------|-------------------------------|--------------------------------|
| 10 | 1 per 10 Wh (up to 3600W), | 1 per 10kWh (up to 3600kW), | 1 per 10MWh (above 3600 kWh) |
| 100 | 1 per 100Wh (up to 3600W), | 1 per 100kWh (up to 3600kW), | 1 per 100MWh (above 3600 kWh) |
| 1000 | 1 per 1000Wh (up to 3600W), | 1 per 1000kWh (up to 3600kW), | 1 per 1000MWh (above 3600 kWh) |

Other Pulse rate divisors (applicable only when Energy on RS485 is in Wh)

| | |
|----------------|-------------------------|
| Pulse duration | 60 ms, 100 ms or 200 ms |
|----------------|-------------------------|

Note : Above conditions are also applicable for Reactive and Apparent Energy .



Measure



Control



Record



Analyze

Parameter Measurement and Display:

| Sr No | Parameter | 3PH 4W | 3PH 3W |
|-------|-----------------------------------|--------|--------|
| 1. | System Volts | ✓ | ✓ |
| 2. | System Current | ✓ | ✓ |
| 3. | Volts L1 – N | ✓ | ✗ |
| 4. | Volts L2 – N | ✓ | ✗ |
| 5. | Volts L3 – N | ✓ | ✗ |
| 6. | Volts L1 – L2 | ✓ | ✓ |
| 7. | Volts L2 – L3 | ✓ | ✓ |
| 8. | Volts L3 – L1 | ✓ | ✓ |
| 9. | Current L1 | ✓ | ✓ |
| 10. | Current L2 | ✓ | ✓ |
| 11. | Current L3 | ✓ | ✓ |
| 12. | Neutral Current | ✓ | ✗ |
| 13. | Frequency | ✓ | ✓ |
| 14. | System Active Power (kW) | ✓ | ✓ |
| 15. | Active Power L1 (kW) | ✓ | ✗ |
| 16. | Active Power L2 (kW) | ✓ | ✗ |
| 17. | Active Power L3 (kW) | ✓ | ✗ |
| 18. | System Re-active Power (kVAr) | ✓ | ✓ |
| 19. | Re-active Power L1 (kVAr) | ✓ | ✗ |
| 20. | Re-active Power L2 (kVAr) | ✓ | ✗ |
| 21. | Re-active Power L3 (kVAr) | ✓ | ✗ |
| 22. | System Apparent Power (kVA) | ✓ | ✓ |
| 23. | Apparent Power L1 (kVA) | ✓ | ✗ |
| 24. | Apparent Power L2 (kVA) | ✓ | ✗ |
| 25. | Apparent Power L3 (kVA) | ✓ | ✗ |
| 26. | System Power Factor | ✓ | ✓ |
| 27. | Power Factor L1 | ✓ | ✗ |
| 28. | Power Factor L2 | ✓ | ✗ |
| 29. | Power Factor L3 | ✓ | ✗ |
| 30. | Phase Angle L1 | ✓ | ✗ |
| 31. | Phase Angle L2 | ✓ | ✗ |
| 32. | Phase Angle L3 | ✓ | ✗ |
| 33. | Import kWh (8 digit resolution) | ✓ | ✓ |
| 34. | Export kWh (8 digit resolution) | ✓ | ✓ |
| 35. | Import kVArh (8 digit resolution) | ✓ | ✓ |
| 36. | Export kVArh (8 digit resolution) | ✓ | ✓ |
| 37. | kVAh (8 digit resolution) | ✓ | ✓ |
| 38. | THD Volts L1-N | ✓ | ✗ |
| 39. | THD Volts L2-N | ✓ | ✗ |
| 40. | THD Volts L3-N | ✓ | ✗ |
| 41. | THD Volts L1-L2 | ✗ | ✓ |
| 42. | THD Volts L2-L3 | ✗ | ✓ |
| 43. | THD Volts L3-L1 | ✗ | ✓ |
| 44. | THD Current L1 | ✓ | ✓ |
| 45. | THD Current L2 | ✓ | ✓ |
| 46. | THD Current L3 | ✓ | ✓ |
| 47. | THD Voltage Mean | ✓ | ✓ |
| 48. | THD Current Mean | ✓ | ✓ |



Measure



Control



Record



Analyze

Order Code:

| Ordering information | Ordering Code |
|---|--------------------------|
| | RISH Master 3430i |
| Accuracy Class | |
| Accuracy 1.0% (Standard) | 1.0 |
| Accuracy 0.5% (on request) | 0.5 |
| Accuracy 0.2% (on request) | 0.2 |
| | |
| Auxiliary Voltage | |
| 60-300V AC DC | H |
| 12-60V AC DC | L |
| | |
| Optional: | |
| RS 485 + 2 Pulse output | 1 |
| RS 485 + 1 Pulse output + 2 Analog output | 2 |
| Ethernet | 3 |
| Option not used | Z |

Order Code Example:

RISH Master 3430i 0.2 – H – 1

RISH Master 3430i , Accuracy 0.2% ,60 - 300V AC DC Auxiliary supply, with MODBUS (RS485),with 2 pulse output.

Rishabh Instruments always tries for Improvement and therefore product specifications are subject to change without notice



Measure



Control



Record



Analyze



RISHABH



Measure



Control



Record



Analyze

RISHABH INSTRUMENTS PVT. LTD.

Trishala Unit, C-6, NICE Area, MIDC, Satpur, Nashik - 422007, India.

Tel: +91 253 2202371 / 028 | Fax: +91 253 2351064 | E-mail: marketing@rishabh.co.in | www.rishabh.co.in