


CRS2CO



connectwell
THE RIGHT CONNECTION

Connectwell Relay Socket DPDT 10A

LED Module for Indication
Easy to replace pluggable relays
Variety of Voltages.

TECHNICAL DATA

Ambient Operating Temperature	-40 to +40 °C
Mounting Possibility	DIN 35/DIN 35-15 Rail
Housing Material	PA66 V0 Grade
Housing Colour	Grey
Rated Voltage	320 V
Rated Current/Channel	10 A

RELAY OUTPUT/CONTACT SPECIFICATIONS

Contact Type	2 CO (DPDT)
--------------	-------------

CONNECTION SPECIFICATIONS

Type of Connection	Screw Connection
Min. Wire Size	0.2 mm ²
Max. Wire Size	4 mm ²
Min. Wire Size(AWG)	24 AWG
Max. Wire Size(AWG)	10 AWG
Screw Size	M3
Wire Stripping Length	10 mm
Torque	0.5 Nm
Torque	4.5 lb-in

ORDERING INFORMATION

CAT. NO.	DESCRIPTION	NO. OF CHN.	DIM. DET.	STD. PACK
CRS2CO	Connectwell Relay Socket DPDT 10A	-	22 X 45.3 X 76 (W X H X L)mm	10


ACCESSORIES

IMAGES	CAT. NO.	DESCRIPTION	STD. PACK
	CA701-1M	Din 35 Rail unslotted 1 meter	50
	CA701-2M	Din 35 Rail unslotted 2 meter	50
	CA701-2M-S	Din 35 Rail slotted 2 meter	50
	CA701-1M-S	Din 35 Rail slotted 1 meter	50
	CA701-15-1M	Din 35 Rail 15 deep unslotted 1 meter	50
	CA701-15-1M-S	Din 35 Rail 15 deep slotted 1 meter	50
	CA701-15-2M	Din 35 Rail 15 deep unslotted 2 meter	50
	CA701-15-2M-S	Din 35 Rail 15 deep slotted 2 meter	50
		SCS0.5/3	Electricians Screwdriver for slotted screws


ACCESSORIES

IMAGES	CAT. NO.	DESCRIPTION	STD. PACK
	MT-CRM4CO	Marker Tag for CRM Series	100
	MT-CRM2CO	Marker Tag for CRM Series	100


PRODUCT DRAWING

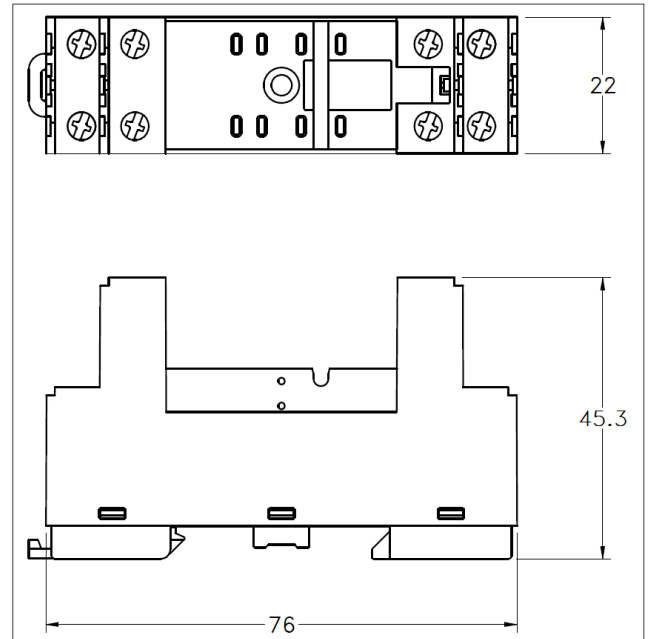

CIRCUIT DIAGRAM

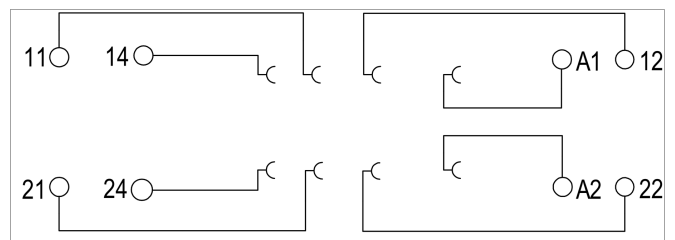

CRS2CO



connectwell
THE RIGHT CONNECTION

NOTES

Pollution Degree - 2
Ingress Protection - IP20
Height With DIN35/7.5 - 47.5 mm
Height with DIN35/15 - 55 mm
Weight - 41.5 gm