


CRS4CO



**connectwell**  
THE RIGHT CONNECTION

**Connectwell Relay Socket 4PDT 10A**

LED Module for Indication  
Easy to replace pluggable relays  
Variety of Voltages.

**TECHNICAL DATA**

Ambient Operating Temperature	-40 to +40 °C
Mounting Possibility	DIN 35/DIN 35-15 Rail
Housing Material	PA66 V0 Grade
Housing Colour	Grey
Rated Voltage	320 V
Rated Current/Channel	10 A

**RELAY OUTPUT/CONTACT SPECIFICATIONS**

Contact Type	4 CO (4PDT)
--------------	-------------

**CONNECTION SPECIFICATIONS**

Type of Connection	Screw Connection
Min. Wire Size	0.2 mm <sup>2</sup>
Max. Wire Size	4 mm <sup>2</sup>
Min. Wire Size(AWG)	24 AWG
Max. Wire Size(AWG)	10 AWG
Screw Size	M3
Wire Stripping Length	10 mm
Torque	0.5 Nm
Torque	4.5 lb-in

**ORDERING INFORMATION**

CAT. NO.	DESCRIPTION	NO. OF CHN.	DIM. DET.	STD. PACK
CRS4CO	Connectwell Relay Socket 4PDT 10A	-	27 X 45,3 X 76 ( W X H X L) mm	10


**ACCESSORIES**

IMAGES	CAT. NO.	DESCRIPTION	STD. PACK
	CA701-1M	Din 35 Rail unslotted 1 meter	50
	CA701-2M	Din 35 Rail unslotted 2 meter	50
	CA701-2M-S	Din 35 Rail slotted 2 meter	50
	CA701-1M-S	Din 35 Rail slotted 1 meter	50
	CA701-15-1M	Din 35 Rail 15 deep unslotted 1 meter	50
	CA701-15-1M-S	Din 35 Rail 15 deep slotted 1 meter	50
	CA701-15-2M	Din 35 Rail 15 deep unslotted 2 meter	50
	CA701-15-2M-S	Din 35 Rail 15 deep slotted 2 meter	50
	SCS0.5/3	Electricians Screwdriver for slotted screws	10

**ACCESSORIES**



IMAGES	CAT. NO.	DESCRIPTION	STD. PACK
	MT-CRM4CO	Marker Tag for CRM Series	100
	MT-CRM2CO	Marker Tag for CRM Series	100
	CRB4	Retaining Bracket	10
	CRL110-230V	110 to 230 VAC/VDC LED Module for AC voltages.	10
	CRL12-60V	12 to 60 VAC/VDC LED Module for AC voltages.	10
	CRLD110-230V	110 to 230 VAC/VDC LED Module with Freewheeling diode for DC voltages.	10
	CRLD12-60V	12 to 60 VAC/VDC LED Module with Freewheeling diode for DC voltages.	10

CRS4C0




**connectwell**  
THE RIGHT CONNECTION

PRODUCT DRAWING

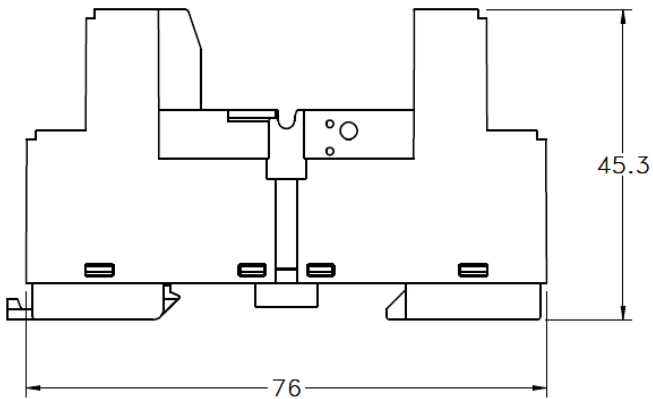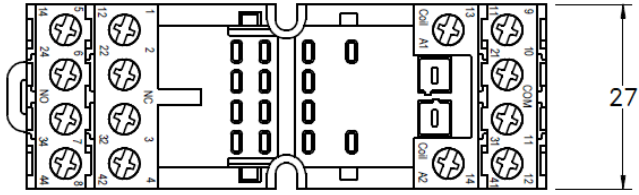

CIRCUIT DIAGRAM

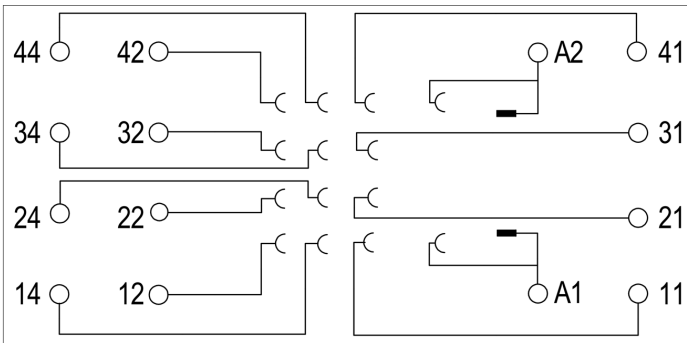

NOTES

Pollution Degree - 2  
 Ingress Protection - IP20  
 Height With DIN35/7.5 - 47.5 mm  
 Height with DIN35/15 - 55 mm  
 Weight - 55.5 gm